


## **Assembly Instructions**

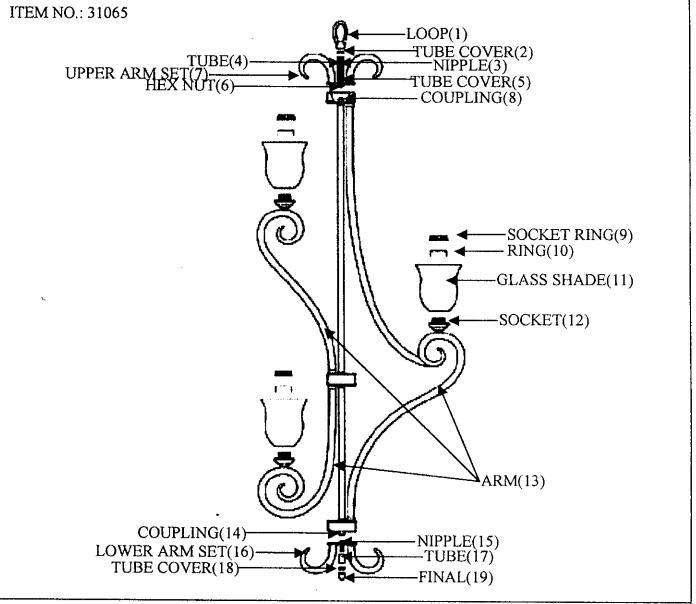

- I, CAREFULLY TAKE THE FIXTURE OUT OF THE CARTON, AND CHECK THAT ALL THE PARTS ARE INCLUDED REFERRING TO THE ABOVE DRAWING.BE SURE NOT TO MISPLACE ANY PARTS THAT ARE NEEDED TO INSTALL THIS LAMP.
- 2, REFER TO MOUNTING AND WIRING INSTRUCTION SHEET.
- 3, THREAD THE HEX NUT(6) ONTO THE NIPPLE(3), THEN SCREW THE NIPPLE(3) INTO THE COUPLING(8), LOCK IT IN PLACE BY HEX NUT(6).
- 4, SLIDE THE UPPER ARM SET(7), TUBE COVER(5), TUBE(4), TUBE COVER(2) ONTO THE NIPPLE(3) IN ORDER, THEN SECURE THEM WITH THE LOOP(1).
- 5, SCREW THE NIPPLE(15) INTO THE COUPLING(14), THEN SLIDE THE LOWER ARM SET(16), TUBE(17), TUBE COVER(18) ONTO THE NIPPLE(15) IN ORDER, FIX THEM BY FINAL(19).
- 6, ADJUST THE ARMS(13) APART TO DESIRED ANGLE.
- 7, PUT GLASS SHADE(11) ONTO SOCKET(12), SECURED THEM WITH RING(10) AND SOCKET RING(9).
- 8, INSTALL THE LAMPS ON.
- 9, THE FIXTURE IS ASSEMBLED.